


Engine Drive Trailers

Engine Drive Accessories 

Quick Specs

Trailer	Net Payload	For Use With
HWY-Mid Frame	1,424 lb (646 kg)	Bobcat™, Trailblazer® and Big Blue® 350/400/450 Pro models
4 West	2,550 lb (1,157 kg)	Big Blue® 500/600/700/800 Pro models
HWY-225	2,700 lb (1,225 kg)	All Big Blue® models

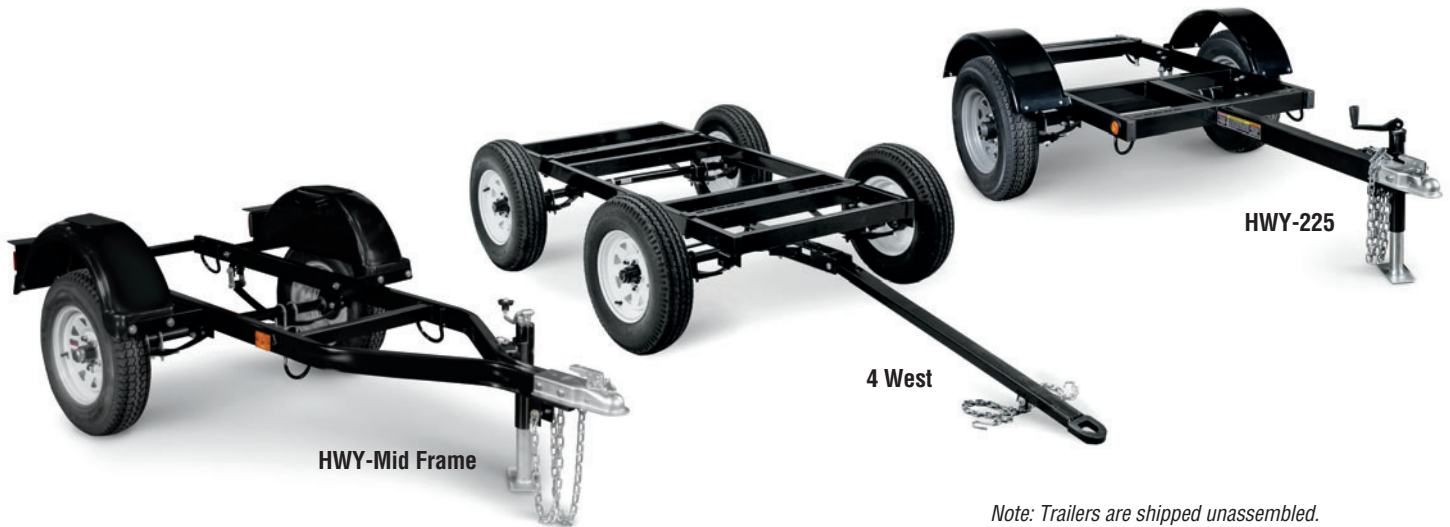

Note: Trailers are shipped unassembled.

HWY-Mid Frame Trailer 301438

A 1,424-pound (646 kg) capacity highway trailer with welded steel tubing frame, heavy-duty axle with roller bearing hubs and leaf-spring suspension. Includes jack stand, fenders, lights, and dual hitch with 2-inch (50 mm) ball hitch and 3-inch (76 mm) lunette eye.

4 West Four-Wheel Steerable Off-Road Trailer 042801

A heavy-duty 2,550-pound (1,157 kg) capacity trailer designed for use in mines, quarries, and other rough terrain. Has narrow 22-foot (6.7 m) turning radius. Includes 3-inch (76 mm) lunette eye, universal hitch and safety chains.

HWY-225 Trailer 301338

A 2,700-pound (1,225 kg) capacity highway trailer with welded steel tubing frame, heavy-duty axle with roller bearing hubs and leaf-spring suspension. Includes jack stand, fenders, lights, and dual hitch with 2-inch (50 mm) ball hitch and 3-inch (76 mm) lunette eye.



Warranted for 1 year, parts and labor.



Miller Electric Mfg. Co.
An ITW Welding Company
1635 West Spencer Street
P.O. Box 1079
Appleton, WI 54912-1079 USA

Equipment Sales US and Canada
Phone: 866-931-9730
FAX: 800-637-2315
International Phone: 920-735-4554
International FAX: 920-735-4125

MillerWelds.com




Specifications (Subject to change without notice.)

Model	Gross Axle Weight Rating	Gross Vehicle Weight Rating	Net Payload	Height of Bed	Road Clearance	Track (Center to Center of Tires)	Standard Tires (Standard Rating or P-size Rating)	Dimensions	Net Weight
HWY-Mid Frame	1,605 lb. (728 kg)	1,424 lb. (646 kg)	1,424 lb. (646 kg)	19.5 in. (495 mm)	8 in. (203 mm)	46 in. (1,168 mm)	ST175/80D-13 Load Range C	Length: 101 in. (2,565 mm)* Width: 55 in. (1,397 mm)	181 lb. (82 kg)
4 West	2,000 lb./axle (907 kg/axle)	3,000 lb. (1,361 kg)	2,550 lb. (1,157 kg)	21.25 in. (540 mm)	8 in. (203 mm)	55.25 in. (1,403 mm)	B78-13	Length: 91 in. (2,311 mm)* Width: 61.25 in. (1,556 mm)	420 lb. (191 kg)
HWY-225	3,500 lb. (1,588 kg)	2,999 lb. (1,360 kg)	2,700 lb. (1,225 kg)	19 in. (483 mm)	7.5 in. (191 mm)	50 in. (1,270 mm)	ST175/80R-13 Load Range D	Length: 105.5 in. (2,680 mm) Width: 56.5 in. (1,435 mm)**	280 lb. (127 kg)

*Width at outside of fenders. **Does not include tongue.

Genuine Miller® Accessories



Dual Hitch 301441

For HWY-Mid Frame and HWY-225.
Combination 2-inch (50 mm) ball hitch and 3-inch (76 mm) lunette eye in one reversible assembly.

Cable Tree 043826

For HWY-Mid Frame and HWY-225. Provides an area to conveniently wrap weld cables and extension cords.

Fender Kit 301439

For HWY-Mid Frame and HWY-225.
Replacement fenders.



2-In-1 Document/ Fire Extinguisher Holder 301236

For HWY-Mid Frame and HWY-225. Stores documents and holds a 5-pound fire extinguisher.

Note: Holder shown mounted on trailer. Fire extinguisher not included.

Ordering Information (Note: Trailers are shipped unassembled.)

Trailers	Stock No.	Description	Qty.	Price
HWY-Mid Frame Trailer	301438	For highway use. Trailer with lights, fenders, dual hitch and jack stand		
4 West Four-Wheel Steerable Trailer	042801	For off-road use. Trailer with lunette eye, universal hitch and safety chains		
HWY-225 Trailer	301338	For highway use. Trailer with lights, fenders, dual hitch and jack stand		
Accessories				
Dual Hitch	301441	For HWY-Mid Frame and HWY-225. Combination 2-inch (50 mm) ball hitch and 3-inch (76 mm) lunette eye in one reversible assembly		
Cable Tree	043826	For HWY-Mid Frame and HWY-225. Trailer-mounted cable holder		
Fender Kit	301439	For HWY-Mid Frame and HWY-225. Replacement fenders		
2-In-1 Document/Fire Extinguisher Holder	301236	For HWY-Mid Frame and HWY-225. Stores documents and holds a 5-pound fire extinguisher		

Date:

Total Quoted Price:

Distributed by:

